



PROFESSIONAL PRODUCT GUIDE





We promise our paint will give you the perfect colour with a uniform finish and the coverage stated, or we'll replace it.*



Perfect Colour

We recognise that choosing the perfect colour isn't always easy. In the unlikely event that you don't love the final colour, we will replace it under the **Dulux Promise**.



Uniform Finish

When you paint a wall, you want a good finish. Our paints will give you an even **uniform finish** without patchiness.



Coverage Stated

You can be confident in the covering power of our paints. Our paint will give the **coverage stated** in our product information.

For further information visit:

duluxtrade.co.uk/promise

PRODUCT AREAS

Walls and Ceilings 6

Trim Products 18

Exterior Products 30

Specialist Products 40

Woodcare 54

Primers 68

Pre-decorative 80

ADDITIONAL INFORMATION

Services 90

Quick Reference Guide 94

SYMBOLS EXPLAINED



Roller



Tube



Cartridge



Conventional Spray



Filling Knife



Skimming Knife



Brush



Airless Spray



Aerosol



Recently Updated Product



New Product



Light & Space

*Terms and conditions apply. Claims must be made within 6 months of purchase. Proof of purchase required. Colour claims limited to 10L per customer. Manufacturer's tips and instructions must have been followed. UK purchases only.

PLEASE NOTE: All quoted touch dry times and recoat times are dependent upon temperature and humidity. Exterior masonry paint coverage figures are only an approximate guide due to the variation of different building surfaces and may be reduced.

WE ARE COMMITTED TO DOING MORE WITH LESS

Dulux Trade believe that a brighter future is possible for our planet if we work to deliver more value from fewer resources.

At **Dulux Trade** we offer solutions that deliver positive sustainability benefits, as well as reducing our products' environmental impact.

We're working to make longer lasting, lower maintenance finishes so that less paint is needed, and we offer water-based alternatives to traditional solvent-based products – making a positive change to how paints impact indoor air quality and the wellbeing of building users.

To find out more check out
duluxtrade.co.uk/sustainability



"As a brand leader we have a critical role to play in reducing the environmental footprint associated with the use of our products and delivering innovations that allow our customers to achieve their sustainability goals."

Duncan Lochhead
Commercial Sustainability Manager,
AkzoNobel Decorative Paints UK & Ireland

LET'S COLOUR

Part of the **Dulux** vision is to make people's lives brighter and more colourful. For 25 years, **Dulux** has sponsored **Community RePaint** - a network that collects leftover paint and passes it on to benefit individuals, families, communities and charities in need at an affordable cost.

Through partnerships with organisations such as **The Outward Bound Trust**, **Dulux** also aims to make a positive difference to disadvantaged young people who are in need of help to improve their life chances.


Dulux
ACADEMY

Lift the lid on your potential

Whether you're starting out in your career or a time served decorator you'll benefit from:

- Over 50 courses across all areas of decorating
- Learning from industry experts
- Exclusive level 3 City & Guilds Qualification
- Access to a post-course members only forum
- Opportunities delivered across a network of UK venues
- Access to tools and equipment from industry leading supplier partners
- CiTB funding on selected courses



Download our Course Prospectus to see our full range of courses. Course dates, venues, prices and availability can be viewed and booked online.

Find out more at www.duluxacademy.co.uk

FREE Podcast
and **FREE**
Academy Live
interactive
workshops



WALLS AND CEILINGS

Dulux Trade decorative finishes offer the highest quality products delivering a variety of best in class properties, such as **durability**, **coverage** or **spreading rate**, to assist you in your internal decoration projects.



WALLS AND CEILINGS

WALL & CEILING PRODUCTS	PLACE OF APPLICATION – INTERIOR SURFACES												RECOATABLE	WATER/ SOLVENT-BASED
	General use	High traffic areas	Plaster Board		Plaster		Woodchip		Blown vinyl wall coverings		Masonry			
			Old	New	Dry	Not fully dry	Old	New	Old	New	Old (Primed & Sealed)	New		
Diamond Matt	●	●	●	●	●		●	●			●		4-6 hours	Water-based
Airsure Vinyl Matt	●		●	●	●		●	●	●	●	●		2-4 hours	Water-based
Airsure Diamond Matt	●	●	●	●*	●		●	●			●		4-6 hours	Water-based
Scuffshield	●	●	●	●*	●		●	●			●		4-6 hours	Water-based
Heritage Velvet Matt	●		●	●	●		●	●	●	●	●		2-4 hours	Water-based
Diamond Eggshell	●	●	●	●	●		●	●			●		4-6 hours	Water-based
Durable Flat Matt	●		●	●	●		●	●	●	●	●		2-4 hours	Water-based
Dulux Trade Evolve Matt	●		●	●	●		●	●	●	●	●		2-4 hours	Water-based
Vinyl Matt	●		●	●	●		●	●	●	●	●		2-4 hours	Water-based
Vinyl Silk	●		●	●	●		●	●	●	●	●		2-4 hours	Water-based
Vinyl Soft Sheen	●		●	●	●		●	●	●	●	●		2-4 hours	Water-based
Ultra Matt			●	●	●		●	●	●	●	●		4 hours	Water-based
Supermatt				●	●	●		●		●		●	2-4 hours	Water-based
Fast Matt			●	●	●		●	●	●	●	●	●	2-4 hours	Water-based
Colour Sampler	●		●	●	●		●	●	●	●	●		2-4 hours	Water-based

*Once sealed with appropriate primer or mist coat - please see product information for more details



“The Dulux Trade range of paints has something for everyone. One of my favourites is Diamond Matt, it’s the best by far. Diamond by name, Diamond quality when applying and when completed.”

Nick Dodge
Dulux Select Decorator Of The Year 2018 - Category Winner



WALLS AND CEILINGS

Dulux Trade Diamond Matt

WATER-BASED
DATA SHEET 447

A tough, cleanable emulsion with a smooth, even matt finish that protects against **scrubs, scuffs** and **stains** for **ultimate durability**



Contains Anti-Fade Technology to protect colour pigments from damage for truly long lasting colour.



BENEFITS	Ultimate durability, scrub, scuff and stain resistant technology, smooth even finish. Tinting Bases and Magnolia also contain Anti-fade technology for truly long lasting colour***
Colour range	PBW, Magnolia and over 11,500 colours*, including Colour Palette, NCS2 and BS colours. Also available in the full Light & Space Colour range*
Pack sizes	2.5L, 5L, 10L**
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

Airless spray application: Thinning is not usually required. **Conventional spray application:** Add up to 1 part clean water to 5 parts paint. **Sealing new or bare surfaces:** Add up to 1 part clean water to 10 parts paint.

- Achieves Class 1 ISO 11998 and Type C BS 7719 scrub ratings • Repeatedly cleanable
- Ideal for use in high traffic areas

*For availability in very deep colours, please contact the **Dulux Trade** Technical Advice Centre.**10L available in white and light base. ***All coloured paints will show signs of fading over time as a result of UV and pollutant exposure, with different colours fading at different rates. Diamond with Anti-Fade Technology will slow down the effects of this exposure, prolonging the life of your colour.

Dulux Trade Airsure Vinyl Matt

WATER-BASED
DATA SHEET 1015

A matt emulsion paint for use on interior walls and ceilings, that is **99.9% VOC Free***, to minimise the impact on indoor air quality**



BENEFITS	Excellent application and finish, high opacity, coverage up to 17m ² per litre, water-based
Colour range	PBW and RAL9010
Pack sizes	10L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	Thinning is not usually required. However, product can be thinned up to 1 part clean water to 5 parts paint if required

Airless spray application: Please refer to data sheet for recommended spray set up. Add up to 1 part clean water to 9 parts paint. **Sealing new or bare surfaces:** Up to 1 part clean water to 5 parts paint.

- Excellent application and finish • High opacity
- *Based on in-can VOC content, measured in accordance with ISO 11890-2:2013. **Independently tested for emissions, including formaldehyde, TVOC, TSVOC and Cat 1A & 1B carcinogens.

Dulux Trade Airsure Diamond Matt

WATER-BASED
DATA SHEET 1014

A tough and cleanable emulsion with a smooth, even matt finish that is **99.9% VOC Free***, to minimise the impact on indoor air quality**



BENEFITS	Scrubs and scuff resistant, with stain repellent technology, to preventing stains from setting into the surface, making cleaning up easier, and helping the finished job look better for longer
Colour range	PBW, RAL9010 and over 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	5L tinted colours & 10L PBW and RAL9010
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	Thinning is not usually required. However, product can be thinned up to 1 part clean water to 10 parts paint if required

Airless spray application: Please refer to data sheet for recommended spray set up. Add up to 1 part clean water to 10 parts paint. **Sealing new or bare surfaces:** Seal with a coat of Dulux Trade Dry Wall Primer Sealer (whites and light colours) or a thinned first coat of Sikken's Alphatex SF Matt (up to 1 part clean water to 5 parts paint).

- Achieves Class 1 ISO 11998 and Type C BS 7719 scrub ratings • Cleanable and stain resistant • Ideal for use in high traffic areas

*Based on in-can VOC content, measured in accordance with ISO 11890-2:2013. **Independently tested for emissions, including formaldehyde, TVOC, TSVOC and Cat 1A & 1B carcinogens.

Dulux Trade Scuffshield Matt

WATER-BASED
DATA SHEET 1012

A tough, matt emulsion paint that contains **ultimate Scuff Resistant Technology**, designed to protect walls against scuff marks



BENEFITS	Protect walls against scuff marks being left behind from items such as shoes and bags. Cleanable with good scrub and stain resistance, which helps keep walls looking good for longer
Colour range	PBW, RAL9010 and over 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	Thinning is not usually required. However, product can be thinned up to 1 part clean water to 10 parts paint if required

Airless spray application: Please refer to data sheet for recommended spray set up. Add up to 1 part clean water to 10 parts paint. **Sealing new or bare surfaces:** Seal with a coat of Dulux Trade Dry Wall Primer Sealer (whites and light colours) or a thinned first coat of Dulux Trade Vinyl Matt (up to 1 part clean water to 5 parts paint).

- Achieves Class 1 ISO 11998 and Type C BS 7719 scrub ratings • Cleanable and stain resistant • Ideal for use in high traffic areas

WALLS AND CEILINGS

Dulux Heritage Velvet Matt

WATER-BASED

A luxury washable matt emulsion formulated with premium quality pigments to guarantee excellent depth of colour and with specially blended clays for effortless application, and an irresistible soft to touch finish



Durability

BENEFITS	Durable & washable. Water-based. Effortless application and an irresistible soft to touch finish with excellent opacity. Scrub Class 1
Colour range	Heritage colour range plus other Dulux Trade and retail colour ranges including colour match
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 13m ² per litre
Thinning	Sealing new or bare surfaces: A thinned first coat (up to 10% water) of Dulux Heritage

- Also available in a 125ml tester pot

Dulux Trade Durable Flat Matt

WATER-BASED

DATA SHEET 440

A contemporary flat matt finish with good durability and opacity, for use on **walls** and **ceilings**



Durability

BENEFITS	Excellent durability in a flat matt finish, with high opacity
Colour range	White and over 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

Airless spray application/sealing new or bare surfaces: Add up to 1 part clean water to 5 parts paint. **Conventional spray application:** Add up to 1 part clean water to 2.5 parts paint.

- Ideal for period and contemporary properties
- Perfect at hiding imperfections and uneven wall surfaces

Dulux Trade Diamond Eggshell

WATER-BASED

DATA SHEET 408/537

A tough, cleanable emulsion with a smooth, even eggshell finish that protects against **scrubs, scuffs and stains** for **ultimate durability**



Contains Anti-Fade Technology to protect colour pigments from damage for truly long lasting colour.

Durability

BENEFITS	Ultimate durability, scrub, scuff and stain resistant technology, smooth even finish. Tinting Bases and Magnolia also contain Anti-Fade Technology for truly long lasting colour
Colour range	PBW, Magnolia** and over 14,000 colours, including Colour Palette, NCS2 and BS colours. Also available in the full Light & Space Colour range*
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Achieves Class 1 ISO 11998 and Type C BS 7719 scrub ratings
- Repeatedly cleanable • Ideal for use in high traffic areas
- Perfect for kitchens and bathrooms

* See back page for details ** 5L only

Dulux Trade Evolve Matt

WATER-BASED

DATA SHEET 1011

A matt emulsion paint for use on **interior walls** and **ceilings**



Lower Embodied Carbon

BENEFITS	High quality finish, made from 35% recycled paint
Colour range	White
Pack sizes	5L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

Airless spray application/Sealing new or bare surfaces: Add up to 1 part clean water to 5 parts paint
Conventional spray application: Add up to 1 part clean water to 2.5 parts paint

- Ideal for use on woodchip, dry plaster and a range of building boards
- Reduced VOC content
- Reduced carbon footprint by 11%

Dulux Trade Vinyl Matt

WATER-BASED
DATA SHEET 411/536

A matt emulsion paint for use on interior walls and ceilings



BENEFITS	Excellent application and finish, high opacity, coverage up to 17m ² per litre, water-based
Colour range	PBW, White, Magnolia, Black, Gardenia, over 14,000 colours, including Colour Palette, NCS2 and BS colours. Also available in the full Light & Space colour range*
Pack sizes	1L**, 2.5L, 5L, 10L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

Airless spray application/Sealing new or bare surfaces: Add up to 1 part clean water to 5 parts paint **Conventional spray application:** Add up to 1 part clean water to 2.5 parts paint.

- Ideal for use on woodchip, dry plaster and a range of building boards

* See back page for details. ** Tinted base only.

Dulux Trade Vinyl Soft Sheen

WATER-BASED
DATA SHEET 413

A mid-sheen emulsion paint for use on interior walls and ceilings



BENEFITS	Tough, washable finish. Fashionable mid-sheen finish. Coverage up to 16m ² per litre, water-based
Colour range	PBW, Magnolia and over 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	1L*, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

Airless spray application: Thinning not required. **Conventional spray application/Sealing new or bare surfaces:** Add up to 1 part clean water to 5 parts paint.

- Ideal for use where a 'Satin' finish is required
- Not suitable for areas subject to heavy condensation, such as kitchens and bathrooms

*Not all colours available in 1L

Dulux Trade Vinyl Silk

WATER-BASED
DATA SHEET 414

A silk emulsion paint for use on interior walls and ceilings



BENEFITS	Tough, washable finish. High opacity. Coverage up to 16m ² per litre, water-based
Colour range	PBW, White, Magnolia and over 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	2.5L, 5L, 10L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

Airless spray application: Thinning not required.

Conventional spray application/Sealing new or bare surfaces: Add up to 1 part clean water to 5 parts paint.

- Enhances low relief wall coverings and textured plaster
- Not suitable for areas subject to heavy condensation, such as kitchens and bathrooms

Dulux Trade Ultra Matt

WATER-BASED
DATA SHEET 549

A matt emulsion paint ideal for use on ceilings



BENEFITS	Non-reflective, ideal for ceilings in critical lighting, excellent touching-in properties, water-based
Colour range	White
Pack sizes	10L
Touch dry	Dependent on temperature and humidity
Recoatable	4 hours
Coverage	Up to 16m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

Conventional Spray: Satisfactory through most equipment.

Airless Spray: A typical set up for airless spray would be a minimum working pressure on paint of 138 bars (2000lb/sq in) with a spray tip size of 0.430.48mm (17-19 thou) and a spray tip angle of 40°.

- Specially formulated to provide a dead matt, non-reflective finish at all angles
- Ideal for hiding surface imperfections

WALLS AND CEILINGS

Dulux Trade Supermatt

WATER-BASED
DATA SHEET 410

A matt emulsion paint for use on **interior walls** and **ceilings** that are not fully dry



BENEFITS	High opacity. Good coverage & application. Ideal for new plaster, water-based
Colour range	White, Magnolia and 150 tinted colours. Almond White and Gardenia are also available in ready mixed as 10L
Pack sizes	5L, 10L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 18m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Airless spray application:** Add up to 1 part clean water to 5 parts paint
Conventional spray application: Add up to 1 part clean water to 2.5 parts paint
Sealing new or bare surfaces: Add up to 1 part clean water to 3 parts paint
- Ideal for use on new or skimmed interior plaster and interior masonry surfaces

Dulux Trade Fast Matt

WATER-BASED
DATA SHEET 515

A ready-for-use flat matt emulsion that is ideal for use on **bare** or **skimmed plasterboard**



BENEFITS	Ready for use. Easy application and low splatter. Suitable for dry lining, water-based
Colour range	White, Magnolia and over 70 tinted colours
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- Airless spray application/Sealing new or bare surfaces:**
Add up to 1 part clean water to 5 parts paint
Conventional spray application: Add up to 1 part clean water to 2.5 parts paint

- Low sheen of product makes touch-in easy and gives an excellent finish

Dulux Trade Colour Sampler

WATER-BASED

Test your colour choice with this matt emulsion



BENEFITS	Test your colour choice where it matters, on the actual surface to be painted - before the decorating starts
Colour range	Over 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	250ml
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	A 250ml can will cover up to 2m ²
Thinning	Thinning not required

- To optimise accuracy, some colours are not available due to tinter shot sizes - your merchant or TAC can advise and recommend a 1L if 250ml can is not available in your choice of colour



TRIM PRODUCTS

Whether revitalising **interior trim** or painting from new, **Dulux Trade** offers the highest quality paints to assist you in achieving a **beautiful lasting finish**.



TRIM PRODUCTS

TRIM PRODUCTS	PLACE OF APPLICATION							RECOATABLE	WATER/ SOLVENT-BASED
	Interior Surfaces					Exterior Surfaces			
	Wood		Metal		Heated Surfaces (e.g. radiators)	Wood	Metal		
	General use	New	General use	New					
Diamond Satinwood	●	●	●	●	●			6 hours	Water-based
Quick Dry Satinwood	●	●	●	●	●			4-6 hours	Water-based
Quick Dry Gloss	●	●	●	●	●			4-6 hours	Water-based
Quick Dry Undercoat	●	●	●	●	●			4-6 hours	Water-based
Satinwood	●	●	●	●	●			16-24 hours	Solvent-based
High Gloss	●	●	●	●	●	●	●	16-24 hours	Solvent-based
Eggshell	●	●	●	●	●			16-24 hours	Solvent-based
Undercoat	●	●	●	●	●	●	●	6-16 hours	Solvent-based
Heritage Eggshell	●	●	●	●	●			6 hours	Water-based
Heritage Quick Dry Primer Undercoat	●	●	●	●	●			4-5 hours	Water-based



“I tried it, I liked it, and now I use it. **Excellent finish by brush and spray application.**”

Steve Dove
Dulux Select Decorator



TRIM PRODUCTS

Dulux Trade Diamond Satinwood

WATER-BASED

DATA SHEET 1006

Superior quality with a **durable finish** for use on interior wood and metal



TIP

To get the best from Diamond Satinwood, lightly dampen a synthetic brush and the surface before application to increase the flow out.

Quick
Drying



BENEFITS	Tough, durable and non-yellowing, suitable for high traffic areas, stain and grease resistant
Colour range	PBW and more than 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	6 hours
Coverage	Up to 12m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- Withstands repeated washing
- For best results use a good quality synthetic (nylon polyester) brush or a short pile synthetic/mohair roller designed for the application of water-based paints
- Can be used on heated surfaces, e.g. hot water pipes and radiators

Dulux Trade Quick Dry Satinwood

WATER-BASED

DATA SHEET 551

An **advanced** water-based, satin finish



TIP

To get the best from Quick Dry Satinwood, lightly dampen a synthetic brush and the surface before application to increase the flow out.

Quick
Drying



BENEFITS	Excellent satin finish. Advanced water-based technology. Tough, durable finish
Colour range	PBW and more than 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	6 hours
Coverage	Up to 12m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- A smooth, durable top coat for use on interior wood and metal
- For best results use a good quality synthetic (nylon polyester) brush or a short pile synthetic/mohair roller designed for the application of water-based paints
- Can be used on heated surfaces, e.g. hot water pipes and radiators

Dulux Trade Quick Dry Gloss

WATER-BASED

DATA SHEET 550

An **advanced** water-based, high gloss finish



TIP

To get the best from the Quick Dry system, lightly dampen a synthetic brush and the surface before application to increase the flow out.

Quick
Drying



BENEFITS	High gloss finish. Advanced water-based technology. Tough and durable
Colour range	PBW and more than 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	6 hours
Coverage	Up to 12m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- A smooth, durable top coat for use on both interior wood and metal
- For best results use a good quality synthetic (nylon polyester) brush or a short pile synthetic/mohair roller designed for the application of water-based paints
- Can be used on heated surfaces, e.g. hot water pipes and radiators although this may increase the speed of yellowing

Dulux Trade Quick Dry Undercoat

WATER-BASED

DATA SHEET 552

The ideal foundation for **Dulux Trade Quick Dry Gloss**



TIP

To get the best from the Quick Dry system, lightly dampen a synthetic brush and the surface before application to increase the flow out.

Quick
Drying



BENEFITS	Excellent coverage. Advanced water-based technology. Perfect for Dulux Trade Quick Dry Gloss
Colour range	White and more than 14,000 colours including Colour Palette, NCS2 and BS colours*
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-5 hours
Coverage	Up to 10m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Can be used on all interior wood and metal
- Excellent opacity and coverage
- For best results use a good quality synthetic (nylon polyester) brush or a short pile synthetic/mohair roller designed for the application of water-based paints
- Can be used on heated surfaces, e.g. hot water pipes and radiators

*Only available in bases.

TRIM PRODUCTS

Dulux Trade Satinwood

SOLVENT-BASED

DATA SHEET 406

For use on **interior wood** and **metal**



TIP

For long-lasting whiteness, we recommend the use of a water-based formulation such as Dulux Trade Quick Dry Satinwood.



BENEFITS	Tough, durable finish. Self undercoating. Dirt resistant**
Colour range	PBW and more than 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	After 4-6 hours
Recoatable	After 16-24 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned with 1 part white spirit to 10 parts paint

- Will withstand repeated washing
- Can be used on heated surfaces, e.g. hot water pipes and radiators although this may increase the speed of yellowing

**Whilst leading-edge technology has been used in development of this product, the nature of solvent-based paints means that they will discolour over time. The rate of discolouration is faster in areas with no or low natural or UV light.

Dulux Trade High Gloss

SOLVENT-BASED

DATA SHEET 403

For general use on **interior wood** and **metal**



BENEFITS	Tough, durable finish. Excellent flow and opacity. Coverage up to 18m ² per litre**
Colour range	PBW, White and Black and more than 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16-24 hours
Coverage	Up to 18m ² per litre on sealed surfaces
Thinning	This product can be thinned with 1 part white spirit to 10 parts paint

- Tough, durable finish with excellent flow out of brushmarks
- Resistant to repeated washing and mild chemical fume attack
- Can be used on heated surfaces, e.g. hot water pipes and radiators although this may increase the speed of yellowing

**Whilst leading-edge technology has been used in development of this product, the nature of solvent-based paints means that they will discolour over time. The rate of discolouration is faster in areas with no or low natural or UV light.

Dulux Trade Eggshell

SOLVENT-BASED

DATA SHEET 405

A tough, durable, mid-sheen finish for **interior wood** and **metal**



BENEFITS	Tough, durable finish. Self undercoating. Coverage up to 17m ² per litre**
Colour range	PBW, White and more than 14,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	After 16-24 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned with 1 part white spirit to 10 parts paint

- Will withstand repeated washing
- Tough, durable finish with mild chemical resistance
- Can be used on heated surfaces, e.g. hot water pipes and radiators although this may increase the speed of yellowing

**Whilst leading-edge technology has been used in development of this product, the nature of solvent-based paints means that they will discolour over time. The rate of discolouration is faster in areas with no or low natural or UV light.

Dulux Trade Undercoat

SOLVENT-BASED

DATA SHEET 404

The ideal foundation for **Dulux Trade High Gloss**. Provides a low-sheen finish with excellent flow out of brush marks



BENEFITS	Excellent opacity. Great flow. Coverage up to 17m ² per litre
Colour range	White, Dark Grey
Pack sizes	1L, 2.5L, 5L
Touch dry	2-6 hours
Recoatable	After 6-16 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned with 1 part white spirit to 10 parts paint

- Retains good 'cling' to sharp edges
- Can also be used with **Dulux Trade Eggshell** and **Satinwood** to provide surface obliteration over strong colours or poor surfaces

TRIM PRODUCTS

Dulux Heritage Eggshell

WATER-BASED

Heritage finest quality Eggshell is for use on wood and metal. It is formulated to provide the most stunningly smooth Eggshell finish to complement the Heritage Velvet Matt for walls



Durability



BENEFITS	Durable, excellent flow and levelling, non-yellowing, high opacity
Colour range	Heritage colour range plus other Dulux Trade and retail colour ranges including colour match
Pack sizes	750ml, 2.5L
Touch dry	Dependent on temperature and humidity
Recoatable	6 hours
Coverage	Up to 14m ² per litre
Thinning	Thinning is not usually necessary, but if required add up to 1 part clean water to 20 parts paint.

Airless spray application: Please refer to data sheet for recommended spray set up

Dulux Heritage Quick Dry Primer Undercoat


WATER-BASED

Heritage Undercoat is a quick drying water-based undercoat. It is part of an advanced paint system for achieving excellent protection and a beautiful finish for interior wood and metal work



BENEFITS	Excellent coverage, advanced water-based technology
Colour range	White
Pack sizes	750ml
Touch dry	Dependent on temperature and humidity
Recoatable	4-5 hours
Coverage	Up to 10m ² per litre
Thinning	Thinning is not usually necessary unless using as a primer on bare wood, in which case add up 1 part clean water to 20 parts paint

Airless spray application: Please refer to data sheet for recommended spray set up



APPLICATION OF WATER-BASED TRIM FINISHES

Dulux Trade water-based range -
quick drying paints that last.



1. For the best results, use a good quality synthetic brush and dampen prior to use. This will help keep your brush workable during the application and increase the flow.



2. To achieve the best adhesion, sand the surface, removing any surface imperfections and taking back the sheen of any previous coating. Dust after sanding.



3. Dampen the area to be painted using a lint free cloth and clean water. This will increase the wet-edge time during application and help give greater flow, reducing brushmarks.



4. If you have large areas to coat, for speed you could use a medium pile roller and lay off with the tips of your synthetic brush.



TIP: Do not over-brush as this will interrupt the drying process and highlight imperfections.

5. After you have finished, just wash your tools with water.



6. Once completed, the top coat will have dried with the speed of a water-based but with the finish of a solvent-based.



EXTERIOR PRODUCTS

By using the **Weathershield** range, you can be confident that you have the **ultimate exterior protection**, with durability that lasts up to **15 years** for exterior masonry paints and up to **8 years** on exterior woodwork.



EXTERIOR PRODUCTS

EXTERIOR PRODUCTS	PLACE OF APPLICATION							TOUCH DRY	WATER/ SOLVENT-BASED
	Masonry		Render	Joinery		Smooth Planed Wood			
	Sound & Dry	Dry & Friable	Sound & Dry	General Use	New or Bare	General Use	New or Bare		
MASONRY PRODUCTS									
Maximum Exposure Smooth Masonry	●		●					30 mins	Water-based
Smooth Masonry Paint	●		●					30 mins	Water-based
Textured Masonry Paint	●		●					1-2 hours	Water-based
Stabilising Primer		●						2-4 hours	Solvent-based
JOINERY/SMOOTH PLANED WOOD PRODUCTS									
Quick Dry Exterior Gloss				●		●		2 hours	Water-based
Quick Dry Exterior Satin				●		●		1-2 hours	Water-based
Quick Dry Exterior Undercoat				●		●		1-2 hours	Water-based
Exterior High Gloss				●		●		4-6 hours	Solvent-based
Exterior Flexible Undercoat				●		●		2-6 hours	Solvent-based
Preservative Primer ^{+(BP)}					●		●	1 hour	Water-based
PREPARATORY PRODUCTS									
Exterior Flexible Filler	●			●		●		2 hours	Water-based
Multi-Surface Fungicidal Wash	●			●		●		n/a	Water-based

EXTERIOR PRODUCTS

Dulux Trade Weathershield
Maximum Exposure Smooth Masonry

WATER-BASED
DATA SHEET 522

A smooth masonry paint offering **excellent durability** and protection even in harsh and demanding environments



TIP Before applying **Weathershield** Maximum Exposure, check the weather conditions and the temperature of the substrate to ensure that the product will cure thoroughly. Remember, it can only cure properly at temperatures above 7°C.

Chemical Resistant



BENEFITS	15 year all weather protection. For use in demanding environments. 5x more flexible than standard Dulux Trade Masonry Paint
Colour range	PBW and 420 lightfast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	5L
Touch dry	30 minutes
Recoatable	After 2-4 hours dependent on temperature and humidity
Coverage	On smooth surfaces: 12-14m ² per litre. On textured surfaces: 4-6m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Salt/chemical spray resistant
- Contains fungicide to help protect against the disfiguring effect of mould growth on its film
- Application from 7°C

Dulux Trade Weathershield
Smooth Masonry Paint

WATER-BASED
DATA SHEET 418

A quick drying water-based **exterior masonry paint** providing a smooth finish



Durability



BENEFITS	15 years all weather protection. Shower proof in 30 minutes. Excellent opacity
Colour range	PBW, Magnolia, 5 ready mixed colours and 420 lightfast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	2.5L, 5L, 10L
Touch dry	30 minutes
Recoatable	After 2-4 hours dependent on temperature and humidity
Coverage	On smooth surfaces of low porosity e.g. rendering: 14-16m ² per litre On textured surfaces of low porosity e.g. pebbledash: 4-6m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- For smooth exterior walls, including: blockwork, concrete, stonework, cement, rendering, roughcast, pebbledash and also brickwork (not common or fletton)
- Contains a fungicide and algicide to help protect against the disfiguring effect within the paint film

Dulux Trade Weathershield
Textured Masonry Paint

WATER-BASED
DATA SHEET 419

A quick drying water-based **exterior masonry paint** providing a textured finish





BENEFITS	10 year all weather protection. Helps bridge fine cracks
Colour range	PBW and 420 lightfast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	5L
Touch dry	1-2 hours
Recoatable	After 2-4 hours
Coverage	On smooth surfaces of low porosity, e.g. rendering: 6-8m ² per litre. On textured surfaces of low porosity, e.g. pebbledash: 3-4m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- For a textured finish on exterior walls, including: blockwork, concrete, stonework, cement, rendering, roughcast, pebbledash and also brickwork (not common or fletton)
- Contains a fungicide and algicide to help protect against the disfiguring effect of surface growth

Dulux Trade Weathershield
Stabilising Primer

SOLVENT-BASED
DATA SHEET 304

A ready-to-use sealer for use with the **Weathershield** range of masonry paints





BENEFITS	Seals and stabilises. For powdery masonry surfaces. Ready for use
Colour range	Clear
Pack sizes	5L
Touch dry	8-12 hours dependent on temperature and humidity
Recoatable	16-24 hours
Coverage	Up to 12m ² per litre on most surfaces
Thinning	This product should not be thinned

- Use only on dry exterior masonry that remains powdery and friable after thorough preparation
- Do not seal sound, new or bare surfaces

EXTERIOR PRODUCTS

Dulux Trade Weathershield Quick Dry Exterior Gloss

WATER-BASED
DATA SHEET 534

A durable water-based quick drying **exterior gloss**, giving up to 6 years protection



BENEFITS	6 year all weather protection. Tough and durable protection. Coverage up to 16m ² per litre
Colour range	PBW and over 620 tinted colours
Pack sizes	1L, 2.5L, 5L
Touch dry	2 hours
Recoatable	4 hours
Coverage	Up to 16m ² per litre
Thinning	This product can be thinned with 1 part clean water to 10 parts paint

- Quick drying, easy clean up
- Excellent flowout of brush marks
- Contains a fungicide to help protect against the disfiguring effect of mould and growth

Dulux Trade Weathershield Quick Dry Exterior Satin

WATER-BASED
DATA SHEET 428

A trim product that has the flexibility and durability of the **Weathershield** system



BENEFITS	6 year all weather protection. Tough and durable protection. Coverage up to 20m ² per litre
Colour range	PBW and over 620 tinted colours
Pack sizes	1L*, 2.5L, 5L**
Touch dry	1-2 hours
Recoatable	After 2-4 hours
Coverage	Up to 20m ² per litre on most surfaces
Thinning	This product can be thinned with 1 part clean water to 10 parts paint

- Contains a fungicide to help protect against the disfiguring effect of mould growth on its film

*Tinted colours only.

**PBW only.

Dulux Trade Weathershield Quick Dry Exterior Undercoat

WATER-BASED
DATA SHEET 531

A quick drying, **water-based undercoat** for exterior trim and woodwork



BENEFITS	6 year all weather protection. Flexible formulation. Coverage up to 16m ² per litre
Colour range	PBW and 18 tinted colours
Pack sizes	1L, 2.5L, 5L*
Touch dry	1-2 hours dependent on temperature and humidity
Recoatable	2-4 hours dependent on temperature and humidity
Coverage	Up to 16m ² per litre on most surfaces
Thinning	This product can be thinned with 1 part white spirit to 10 parts paint

- Provides excellent opacity
- Quick drying easy clean up
- Great flexibility to help cope with the natural movement of wood

*PBW only.

Dulux Trade Weathershield Exterior High Gloss

SOLVENT-BASED
DATA SHEET 401

For general use on exterior joinery and smooth planed wood. Part 3 of the **Weathershield Exterior Gloss System (WEGS)**



TIP To get up to 8 years weather protection, you should always use the recommended system. For previously painted surfaces, apply one coat of undercoat and two coats of the gloss for a perfect gloss finish.



BENEFITS	8 year all weather protection*. Tough and durable production. Coverage up to 18m ² per litre
Colour range	PBW, Black and more than 4000 tinted colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16-24 hours
Coverage	Up to 18m ² per litre on most surfaces
Thinning	This product can be thinned with 1 part white spirit to 10 parts paint

- Provides an excellent high gloss finish
- Can also be used on plastic gutters, pipes and primed metal such as garage doors
- Contains a fungicide to help protect against the disfiguring effect of mould growth within the paint film

*Our WEGS system is accredited by the British Board of Agrément. In normal conditions WEGS will have good colour stability and perform satisfactorily for up to 8 years.

EXTERIOR PRODUCTS

Dulux Trade Weathershield Exterior Flexible Undercoat

SOLVENT-BASED
DATA SHEET 402

A flexible exterior undercoat for use with **Weathershield** Exterior High Gloss. Part 2 of the **Weathershield** Exterior Gloss System (WEGS)



BENEFITS	8 year all weather protection*. Excellent flexibility and adhesion. Coverage up to 16m² per litre
Colour range	Brilliant White, Dark Grey and 17 tinted colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16-24 hours
Coverage	Up to 16m² per litre on most surfaces
Thinning	This product can be thinned with 1 part white spirit to 10 parts paint

- Provides good build and excellent opacity
- Can also be used on primed metal such as fences, pipes and garage doors
- For the best results, you should always use the correct system to ensure maximum durability

*Our WEGS system is accredited by the British Board of Agrément. In normal conditions WEGS will have good colour stability and perform satisfactorily for up to 8 years. †see back page for details

Dulux Trade Weathershield Preservative Primer†

WATER-BASED
DATA SHEET 540

A water-based preservative basecoat for use as Part 1 of the **Weathershield** Exterior Gloss System (WEGS)



This primer is water-based, protects from decay as well as blue stain and it is better for the environment.



BENEFITS	8 year all weather protection*. Penetrates and seals new bare wood. Protects from decay and blue stain fungi†
Colour range	Colourless
Pack sizes	1L, 2L
Touch dry	16-24 hours
Recoatable	Allow the previous coat to soak in before applying the next
Coverage	4-5m²
Thinning	This product should not be thinned

- Provides a sound basecoat for **Weathershield** Exterior Flexible Undercoat and High Gloss
- Registered with HSE as a registered biocide

*Our WEGS system is accredited by the British Board of Agrément. In normal conditions WEGS will have good colour stability and perform satisfactorily for up to 8 years. †see back page for details

Dulux Trade Weathershield Exterior Flexible Filler

WATER-BASED
DATA SHEET 802

An **exterior filler** for filling in open joints, splits and minor cracks in **wood** and **masonry** surfaces



BENEFITS	Superior flexibility. Resists shrinking and cracking. Easy to sand
Colour range	Light Grey
Pack sizes	450g
Touch dry	2 hours depending on depth of the repair
Thinning	This product should not be thinned, but can be made easier to apply by adding a few drops of water

- Can be used with most **Dulux Trade** exterior finishes
- Not suitable for use with varnish systems or woodstains
- Not to be used as a fine surface filler or for major repairs

Dulux Trade Weathershield Multi-Surface Fungicidal Wash

WATER-BASED
DATA SHEET 803

A fungicidal wash for cleaning **wood** and **masonry** surfaces



BENEFITS	Ready for use. Kills algae and mould growth. For wood and masonry surfaces
Colour range	Clear
Pack sizes	5L
Coverage	Up to 25m² per litre
Thinning	This product should not be thinned

- Registered with the HSE as a registered biocide
- Can be used both inside and out with most **Dulux Trade** and **Weathershield** decorative paint systems, to give improved performance in areas subject to attack from surface growths

SPECIALIST PRODUCTS

In demanding commercial environments, the **innovative range** of specialist products from **Dulux Trade** offers you **high performing solutions**.



SPECIALIST PRODUCTS

SPECIALIST PRODUCTS	PLACE OF APPLICATION									RECOATABLE	WATER/ SOLVENT-BASED
	Interior Walls and Ceilings	Interior Concrete Walls	Exterior Concrete Walls		Exterior Brick	Cladding	Metal	Wood	Floors e.g. Wood, Concrete, Steel etc.		
			Bare	Painted							
Sterishield Diamond Matt	●									4-6 hours	Water-based
Sterishield Diamond Eggshell	●									4-6 hours	Water-based
Mouldshield Fungicidal Matt	●									4-6 hours	Water-based
Mouldshield Fungicidal Eggshell	●									4-6 hours	Water-based
Pyroshield Basecoat	●	●								12 hours	Water-based
Pyroshield Durable Matt	●	●								2-4 hours	Water-based
Pyroshield Durable Eggshell	●	●								2-4 hours	Water-based
Anti-Graffiti Primer	●	●	●	●						16 hours	Water-based
Anti-Graffiti Clearcoat	●	●	●	●						16 hours	Water-based
Block Filler Plus	●	●								4 hours	Water-based
Dry Fall Eggshell	●	●								2 hours	Water-based
Floorshield									●	12-16 hours	Solvent-based
High Performance Floor Paint									●	16-24 hours	Water-based
Line Marking Paint									●	1 hour	Solvent-based
Cladshield						●				4-6 hours	Water-based
PLUS Smartshield+			●		●					30 mins	Water-based
Aluminium Paint							●	●		16-24 hours	Solvent-based
Metalshield Gloss							●			4-6 hours	Solvent-based
Metalshield Satin							●			4-6 hours	Solvent-based

SPECIALIST PRODUCTS

Dulux Trade Sterishield Diamond Matt

WATER-BASED

DATA SHEET 519

A quick drying water-based matt emulsion, containing an in-film bactericide which inhibits bacteria. Suitable for all normal **interior wall** and **ceiling surfaces***



Durability

Anti-Bacterial



BENEFITS	Anti-bacterial. Tough, scrubbable and stain resistant. Contains an active silver bactericide
Colour range	More than 10,000 colours, including Colour Palette, NCS2 and BS colours*
Pack sizes	5L
Touch dry	Dependent upon temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Formulated to reduce bacterial populations of MRSA, E-Coli and Pseudomonas Aeruginosa
- Silver bactericide actively inhibits bacteria
- Durable washable matt finish

*For availability in very deep colours please contact the **Dulux Trade** Technical Advice Centre.
#Sterishield from **Dulux Trade** is not a substitute for good hygiene practices.

Dulux Trade Sterishield Diamond Eggshell

WATER-BASED

DATA SHEET 520

A quick drying water-based mid-sheen emulsion, containing an in-film bactericide which inhibits bacteria. Suitable for all normal **interior wall** and **ceiling surfaces***



Durability

Anti-Bacterial



BENEFITS	Anti-bacterial. Tough, scrubbable and stain resistant. Contains an active silver bactericide
Colour range	More than 10,000 colours, including Colour Palette, NCS2 and BS colours
Pack sizes	5L
Touch dry	Dependent upon temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 17m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Formulated to reduce bacterial populations of MRSA, E-Coli and Pseudomonas Aeruginosa
- Silver bactericide actively inhibits bacteria
- Durable washable eggshell finish

#Sterishield from **Dulux Trade** is not a substitute for good hygiene practices.

Dulux Trade Mouldshield Fungicidal Matt

WATER-BASED

DATA SHEET 412

A matt **emulsion paint** that contains a mild fungicide**



Anti-fungal



BENEFITS	Antifungal. Inhibits mould and fungi growth on walls. Good adhesion and durability
Colour range	PBW and over 7,000 colours, including many Colour Palette, NCS2 and BS colours
Pack sizes	5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- For use on interior walls and ceilings where surface mould growths are a problem
- Ideal for use on woodchip, blown vinyl wall coverings etc., as well as dry plaster and a range of building boards

##See back page for details

Dulux Trade Mouldshield Fungicidal Eggshell

WATER-BASED

DATA SHEET 409

An **eggshell emulsion** paint that contains a mild fungicide and is ideal for kitchens and bathrooms**



Anti-fungal



BENEFITS	Antifungal. Inhibits mould and fungi growth on walls. Excellent adhesion and durability
Colour range	PBW and more than 7,000 colours, including many Colour Palette, NCS2 and BS colours
Pack sizes	5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- More resistant to condensation than conventional emulsion paints
- For use on interior walls and ceilings where surface mould growth is a problem


##See back page for details

SPECIALIST PRODUCTS

Dulux Trade
Pyroshield Basecoat

WATER-BASED
DATA SHEET 450

A flame-retardant basecoat to be used as part of a system for upgrading the reaction to fire surface classification over previously painted multi-layer Class 4 wall and ceiling surfaces*

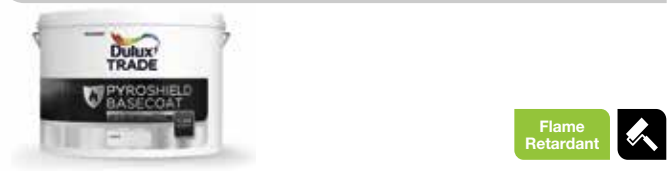

Durability

Flame Retardant


BENEFITS	Flame retardant. Upgrades Class 4 Warrington blue board surface to Class O*. For use over multi-layered wall and ceiling surfaces
Colour range	White
Pack sizes	10L
Touch dry	2 hours
Recoatable	12 hours
Coverage	3 coats of Pyroshield are normally required to achieve a combined coverage of 0.46m² per litre, Pyroshield Basecoat should be applied by roller to achieve a coverage of 1.4m² per litre, per coat. A 10L container of Pyroshield Basecoat from Dulux Trade should cover no more than 14m²
Thinning	This product should not be thinned, but must be stirred thoroughly in the can before use

- No antimony or brominated compounds. Water-based, quick drying formulation
 - The thick film gives a slightly textured finish, which may be modified with appropriate texturing tools
 - Overcoat Pyroshield Basecoat with a Pyroshield topcoat
- *When applied in accordance with manufacturers instructions. It is essential that the specification and AkzoNobel usage instruction are strictly adhered to. Insufficient coats of the fire retardant paint or the incorrect application of it may result in a risk to both people and property in the event of a fire. The products and product information are designed for appliers who have the requisite professional skills and knowledge.

Dulux Trade
Pyroshield Durable Matt

WATER-BASED
DATA SHEET 444

A water-based flame retardant matt finish that upgrades substrates to fire classification Class 0 using the specified system depending on the substrate classification (tested to BS476, parts 6 and 7)

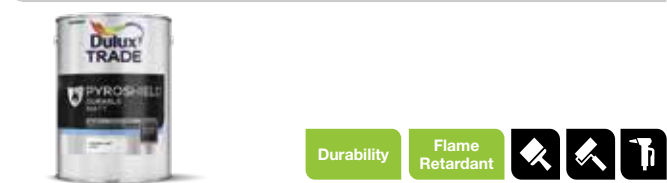

Durability

Flame Retardant


BENEFITS	Flame retardant. Upgrades to Class O using the specified system
Colour range	Available in PBW, and a range of tinted colours
Pack sizes	5L
Touch dry	2-4 hours
Recoatable	2-4 hours
Coverage	2 coats of Pyroshield Durable Matt are required at a coverage of 12m² per litre
Thinning	This product must not be thinned

- No antimony or brominated compounds
- Inhibits the spread of flame on previously painted wall and ceiling surfaces, and is proven to upgrade Class 3 substrates to Class O*
- Suitable for all plaster-based interior wall and ceiling surfaces

Dulux Trade
Pyroshield Durable Eggshell

WATER-BASED
DATA SHEET 448

A water-based flame retardant eggshell finish that upgrades substrates to fire classification Class 0 using the specified system depending on the substrate classification (tested to BS476, parts 6 and 7)

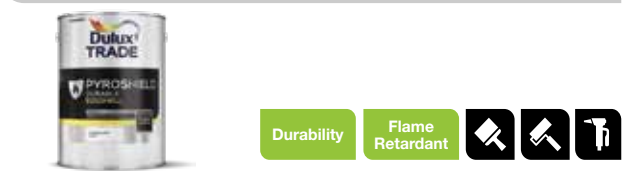

Durability

Flame Retardant

BENEFITS	Flame retardant. Upgrades to Class O using the specified system
Colour range	Available in PBW, and a range of tinted colours
Pack sizes	5L
Touch dry	Dependent upon temperature and humidity
Recoatable	2-4 hours
Coverage	2 coats of Pyroshield Durable Eggshell are required at a coverage of 12m² per litre
Thinning	This product must not be thinned

- No antimony or brominated compound
- Inhibits the spread of flame on previously painted wall and ceiling surfaces and is proven to upgrade Class 3 substrates to Class O*
- Suitable for all plaster-based interior wall and ceiling surfaces

*When applied in accordance with manufacturers instructions. It is essential that the specification and AkzoNobel usage instruction are strictly adhered to. Insufficient coats of the fire retardant paint or the incorrect application of it may result in a risk to both people and property in the event of a fire. The products and product information are designed for appliers who have the requisite professional skills and knowledge.



SPECIALIST PRODUCTS

Dulux Trade
Anti-Graffiti Primer

WATER-BASED
DATA SHEET 813

For use prior to applying colour and an Anti-Graffiti Clearcoat finish to previously painted surfaces or sealed, bare concrete



BENEFITS	Extra durability. For use on bare or sealed surfaces. Interior and exterior use
Colour range	White
Pack sizes	5L when mixed (4L Base and 1L Activator)
Touch dry	4-6 hours at 20°C
Recoatable	Minimum 16 hours, maximum 7 days. Hard dry after 16 hours
Coverage	Up to 10m ² per litre
Pot life	6 hours at 20°C

- Use as part of the anti-graffiti system
- For use on areas exposed to repeated graffiti
- Can also be used as a hygienic coating e.g. hospitals, industrial kitchens and food and drink processing industries

Dulux Trade
Anti-Graffiti Clearcoat

WATER-BASED
DATA SHEET 816

A tough gloss finish clear topcoat for the Dulux Trade **Anti-Graffiti** system



BENEFITS	Extra durability. For use on primed or previously coated surfaces. Interior and exterior use
Colour range	Clear
Pack sizes	5L when mixed (3.91L Base and 1.09L Activator)
Touch dry	6 hours at 20°C
Recoatable	Minimum 16 hours, maximum 7 days. Hard dry after 16 hours
Coverage	Up to 8m ² per litre

- Dries to a tough, gloss finish that has good impact and abrasive qualities
- Can be used in areas where a low odour finish is required, e.g. hospitals, school and public buildings
- Pot life of up to 2 hours once mixed
- Product contains isocyanates; requires trained user to apply. Sold via AkzoNobel specification only.

Dulux Trade
Block Filler Plus

WATER-BASED
DATA SHEET 448

Fills minor imperfections and upgrades the appearance of **concrete** and **concrete blocks** to achieve a smooth finish



BENEFITS	Excellent filling properties. For use on concrete surfaces
Colour range	White
Pack sizes	10L
Touch dry	1 hour
Recoatable	4 hours
Coverage	5m ² per litre depending upon the porosity of the substrate
Application	Apply by airless spray then back roll to fill all voids and holes
Thinning	This product should not be thinned

- Can be top coated with a range of finishes
- Fast and effective spray and back rolling application

Dulux Trade
Dry Fall Eggshell

WATER-BASED
DATA SHEET 444

A mid-sheen **emulsion paint** for use on commercial ceilings and walls



BENEFITS	Covers all substrates. Excellent opacity and adhesion. Overspray dries to a dust*
Colour range	White
Pack sizes	10L
Touch dry	30 minutes
Recoatable	2 hours
Coverage	Up to 9m ² per litre
Application	This product is formulated for airless spray only
Thinning	Thinning not generally required

- Ideal for use on large areas which must be painted with minimum disruption
- Excellent finish, high opacity
- Very good adhesion, quick drying

*On a drop of 10 ft/3.3m at 25°C and 50% RH

SPECIALIST PRODUCTS

Dulux Trade Floorshield

SOLVENT-BASED

DATA SHEET 507

A hard-wearing floor paint ideal for use in **domestic, commercial** and **light industrial environments**



BENEFITS	Hard wearing. Suitable for light to medium traffic areas. Mid-sheen finish
Colour range	Ash Grey and over 1,500 colours
Pack sizes	5L
Touch dry	2-4 hours
Recoatable	12-16 hours
Coverage	Up to 16m ² per litre
Thinning	Thinning not generally required. For sealing new or bare surfaces add up to 1 part white spirit to 10 parts of paint

- Withstands scuffing, repeated washing and mild chemical spillage
- Formulated for use on concrete, wood and steel
- Suitable for light to medium traffic areas

Dulux Trade High Performance Floor Paint

WATER-BASED

DATA SHEET 533

A two pack water-based epoxy **floor paint** suitable for areas of high wear and commercial usage



TIP

Supplied in correct proportions – add all of the Base to the Activator container and mix thoroughly for at least 5 minutes, until the product is smooth and even.



BENEFITS	Optimum performance. Highly durable, 2 pack system. Suitable for use in heavy commercial environments
Colour range	Goosewing and Tideway
Pack sizes	5L when mixed (1.78L Base and 3.22L Activator)
Touch dry	4-6 hours
Recoatable	16-24 hours
Coverage	Up to 6m ² per litre
Thinning	This product can be thinned for ceiling, new or bare surfaces. Please refer to data sheet for details

- Highly durable mid-sheen finish
- Excellent abrasion resistance on concrete and metal floors
- Pot life of up to 1 hour once mixed

Dulux Trade Line Marking Paint

SOLVENT-BASED

DATA SHEET 525

A hard-wearing, single pack, acrylated rubber line marking paint for **interior** and **exterior** use



BENEFITS	Excellent scuff resistance. High build finish. Withstands mild chemical spillage and repeated washing
Colour range	White, yellow
Pack sizes	5L
Touch dry	30 minutes
Recoatable	1 hour
Coverage	Up to 10m ² per litre
Thinning	This product should not be thinned

- Excellent adhesion and durability
- Ideal for use in marking areas such as car parks and demarcation zones on concrete and asphalt surfaces

Dulux Trade Cladshield

WATER-BASED

DATA SHEET 532

A water-based **mid-sheen formulation** offering up to 8 years protection for Plasticol coated and coil clad buildings



BENEFITS	8 year protection. For previously painted, or weathered cladding. Highly durable
Colour range	420 light fast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	5L
Touch dry	2-4 hours
Recoatable	4-6 hours
Coverage	Up to 17m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Tough and durable
- Suitable for application over previously painted and weathered cladding

SPECIALIST PRODUCTS

Dulux Trade PLUS Smartshield+

WATER-BASED

DATA SHEET 1007

Invisible exterior coating which effectively repels rain water for up to **10 years**



BENEFITS	Invisible exterior water repellent coating to reduce rain water penetration into solid walls without sealing the surface, allowing the wall to dry-out; helping to improve thermal efficiency
Colour range	Clear
Pack sizes	10L
Touch dry	1-2 hours
Recoatable	Can be applied wet-on-wet once the product has been fully absorbed (approximately 30 mins). Re-coatable with exterior masonry paints (after minimum 6 months)
Coverage	Up to 2m ² per litre per coat depending on application type and absorbency of substrate

- Fast spray application

Dulux Trade Aluminium Paint

SOLVENT BASED

DATA SHEET 505

A paint to provide an aluminium finish for interior/exterior wood and metal surfaces



BENEFITS	Aluminium Paint is a solvent-based paint designed to provide an aluminium finish for interior/exterior wood and metal surfaces.
Colour range	Aluminium
Pack sizes	5L
Touch dry	5 hours
Recoatable	24 hours
Coverage	Up to 24m ² per litre on sealed surfaces
Thinning	This product should not be thinned

- Surfaces should be suitably clean and primed
- Can withstand temperatures of up to 200°C on metal only

Dulux Trade Metalshield Gloss

SOLVENT-BASED

DATA SHEET 512

A high performance **metal coating** formulated to provide long-lasting protection against corrosion



Durability



BENEFITS	8 year protection*. High performance protection for metal. For ferrous and non-ferrous
Colour range	White, Black, Silver, Gold and over 1,500 colours
Pack sizes	1L, 2.5L, 5L
Touch dry	1-2 hours
Recoatable	4-6 hours
Coverage	Up to 13m ² per litre
Thinning	This product should not be thinned

- Suitable for railings, garage doors, lift shafts, staircases and emergency exit routes
- Attractive gloss finish available in a range of colours

*Applying our straight-forward system – an appropriate Metalshield Primer plus 2 coats of Metalshield Gloss or Satin – will deliver up to 8 years metal protection

Dulux Trade Metalshield Satin

SOLVENT-BASED

DATA SHEET 541

A high performance **metal coating** formulated to provide long-lasting protection against corrosion



Durability



BENEFITS	8 year protection*. High performance protection for metal. For ferrous and non-ferrous
Colour range	White, Black and over 1,500 colours
Pack sizes	2.5L, 5L
Touch dry	1-2 hours
Recoatable	4-6 hours
Coverage	Up to 13m ² per litre
Thinning	This product should not be thinned

- Suitable for railings, garage doors, lift shafts, staircases and emergency exit routes
- Attractive satin finish available in a wide range of colours

*Applying our straight-forward system – an appropriate Metalshield Primer plus 2 coats of Metalshield Gloss or Satin – will deliver up to 8 years metal protection

WOODCARE

To protect internal and external wood for the long term, **Dulux Trade** offers a wide range of professional woodcare products. Formulated for **exceptional performance**, each has been developed to deliver **outstanding results** for any job.



CHOOSE THE RIGHT PRODUCT FOR THE JOB

There are many factors to consider when choosing the right product for any given woodcare job. You can be rest assured that with the comprehensive **Dulux Trade** range, you'll quickly find the perfect answer.

FACTORS TO CONSIDER WHEN CHOOSING WOODCARE COLOURS

- Number of coats being applied
- Application rate
- Absorbency
- Texture
- Original colouration
- Condition of substrate
- Hardwood or softwood

All of the above will affect the final colour. For this reason **Dulux Trade** recommends applying a trial coat on a small inconspicuous area before committing to a given shade.

HIGH OR LOW-BUILD?

High and medium-build products, such as the Ultimate and Quick Dry ranges, provide a thicker coat and increased durability ideal for joinery items such as windows or doors.




Low-build, such as Classic Select Woodstain, is the preferred choice when more penetration of the wood is required, and timber movement is more likely (e.g. cladding/fascias etc.)

High-build



Low-build



-  Coating above the surface
-  Coating below the surface
-  Wood layer

SEMI-TRANSPARENT OR OPAQUE?

Semi-transparent, for example Ultimate Woodstain, are available in a range of natural wood colours, and are perfect for showing off the natural wood grain.

Opagues, such as Ultimate Opaque, provide a solid colour finish, ideal for hiding imperfections, yet allow the wood texture to show.

WATER-BASED OR SOLVENT-BASED?

As with high and low-build formulations, water and solvent-based products offer differing benefits to suit different applications:

WATER-BASED BENEFITS

Low odour
Quick drying
Lower environmental impact
Minimal discolouration for clear coats
Easy clean-up of brushes and equipment

SOLVENT-BASED BENEFITS

Traditional
Will not raise the grain of the wood as much
Longer working time



Interior Products	Place of Application							Water/ Solvent- Based
	Doors	Floors	Furniture	Trim	Joinery	Product Finish		
						Semi-Transparent	Clear	
Diamond Glaze Varnish	•	•	•	•	•	•	•	Water-based
Quick Dry Varnish	•		•	•	•	•	•	Water-based
Polyurethane Varnish	•		•	•	•		•	Solvent-based
Protective Woodsheen Woodstain	•		•	•	•	•		Solvent-based
Danish Oil			•		•		•	Solvent-based

EXTERIOR PRODUCTS	PLACE OF APPLICATION						WATER/ SOLVENT- BASED
	Doors	Joinery	Fascias/Cladding	Product Finish			
				Semi-Transparent	Clear	Opaque	
Quick Dry Woodstain	●	●	●	●			Water-based
Quick Dry Opaque	●	●	●			●	Water-based
Ultimate Woodstain	●	●	●	●			Solvent-based
Ultimate Opaque	●	●	●			●	Solvent-based
Classic Select Woodstain			●	●			Solvent-based
Yacht Varnish	●				●		Solvent-based

Dulux Trade
Diamond Glaze Varnish

WATER-BASED
DATA SHEET 616

A water-based varnish for maximum durability, ideal for **doors, trim, furniture and other joinery**



Durability

Quick
Drying

BENEFITS	For all high wear interior wood surfaces, especially floors. Up to 10 times tougher than conventional varnish*. Water-based and quick drying
Colour range	Clear gloss and satin finishes. Also available in 21 natural wood and 18 designer colours (colours only available in satin finish)**
Pack sizes	1L, 2.5L, 5L
Touch dry	1-2 hours [‡]
Recoatable	2-4 hours
Coverage	Smooth wood: up to 25m ² /litre/coat (normally 2-3 coats on new/bare wood)

- Resistant to common chemicals, alcohol and water

*10 times tougher than conventional varnish, based on hardness tests undertaken with the use of Research Equipment London (REL) testing equipment.** Depth of colour: Clear finish: Apply three finishing coats of clear satin or gloss Translucent Colour: Apply one coat of clear gloss followed by one coat of colour followed by one coat of clear (satin or gloss). Deeper colour: Apply one coat of clear gloss followed by two coats of colour.
[‡]Light foot traffic is possible after 24 hours but to prevent possible damage to the floor while the full mechanical resistance develops, avoid heavy wear and do not replace carpet or rugs or move furniture for at least 7 days after application.

Dulux Trade
Quick Dry Varnish

WATER-BASED
DATA SHEET 604

A quick drying interior varnish, ideal for **doors, trim, furniture and other joinery**



Quick
Drying

BENEFITS	Contains Polyurethane. Touch dry in 30 minutes, recoat in 2 hours
Colour range	Clear gloss and satin finishes. Also available in 21 natural wood and 18 designer colours (colours only available in satin finish)
Pack sizes	1L, 2.5L
Touch dry	30mins
Recoatable	2 hours
Coverage	Smooth wood: up to 20m ² /litre/coat (normally 2 coats)

- Can be used on bare or previously varnished surfaces or over wood dye

Dulux Trade
Polyurethane Varnish

SOLVENT-BASED
DATA SHEET 607

A high-build interior varnish, ideal for **doors, trim, furniture and other joinery**



BENEFITS	Clear solvent-based finish. Withstands knocks, scuffs and spills
Colour range	Clear gloss, matt and satin finishes
Pack sizes	1L, 2.5L, 5L
Touch dry	6-8 hours
Recoatable	16-24 hours
Coverage	Smooth wood: up to 16m ² /litre/coat (normally 2 coats)

- Can be used on bare or previously varnished surfaces or over wood dye

Dulux Trade Protective
Woodsheen Woodstain

SOLVENT-BASED
DATA SHEET 605

A semi-transparent woodstain, ideal for **interior joinery**



BENEFITS	Durable – offers up to 4 years protection for interior doors, trim and joinery. Stain resistant finish
Colour range	Available in 21 natural wood and 18 designer colours including 5 ready-mixed colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16 hours
Coverage	Smooth wood: up to 20m ² /litre/coat (normally 2 coats)

- Suitable for hardwoods and softwoods
- Provides a durable finish to resist wear-and-tear

Dulux Trade Danish Oil

SOLVENT-BASED

DATA SHEET 620

A natural oil that permeates the **wood surface**



BENEFITS	Water-resistant, clear matt finish. Suitable for both internal and external hardwoods and softwoods
Colour range	Clear
Pack sizes	1L, 2.5L
Touch dry	4-6 hours
Recoatable	16 hours
Coverage	Up to 6m ² /litre depending on porosity of the wood

- Application with brush or cloth
- N.B.** Risk of self-ignition of used cleaning rags. Contaminated materials should be soaked in warm, soapy water and placed in a closed metal container before disposal.

Dulux Trade Quick Dry Woodstain

WATER-BASED

DATA SHEET 615

A quick drying, high performance semi-transparent woodstain, ideal for **exterior joinery** and **cladding**



BENEFITS	Exceptional durability – up to 10 years protection. Excellent spreading rate of up to 20m ² per litre
Colour range	Available in 21 natural wood colours
Pack sizes	1L, 2.5L, 5L
Touch dry	1 hour
Recoatable	2 hours
Coverage	Smooth wood: Up to 20m ² /litre/coat (normally 2 coats)

- Highly flexible finish resists cracking, flaking and peeling
 - Quick drying - recoatable in 2 hours
- N.B.** For new wood, use with **Dulux Trade Weathershield Preservative Primer**[†]
- [†]See back cover for full details.

Dulux Trade Quick Dry Opaque

WATER-BASED

DATA SHEET 611

A quick drying water-based opaque finish, ideal for **exterior joinery** and **cladding**



BENEFITS	Exceptional durability – up to 10 years protection. Excellent spreading rate of up to 20m ² per litre
Colour range	Available in Black and White ready-mixed and 600 colours within the opaque range
Pack sizes	1L, 2.5L, 5L
Touch dry	1 hour
Recoatable	2 hours
Coverage	Smooth wood: Up to 20m ² /litre/coat (normally 2 coats)

- Highly flexible opaque finish resists cracking, flaking and peeling
 - Quick drying - recoatable in 2 hours
- N.B.** For new wood, use with **Dulux Trade Weathershield Preservative Primer**[†]
- [†]See back cover for full details.



Dulux Trade
Ultimate Woodstain

SOLVENT-BASED
DATA SHEET 623

A high performance **semi-transparent** woodstain, ideal for **exterior joinery** and **cladding**



BENEFITS	Exceptional durability – up to 10 years protection. Excellent spreading rate of up to 20m² per litre
Colour range	Available in 21 natural wood colours including 5 ready-mixed colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16 hours
Coverage	Smooth wood: up to 20m²/litre/coat (normally 2 coats)

- Highly flexible finish resists cracking, flaking and peeling
- Excellent water repellency

N.B. For new wood, use with **Dulux Trade Weathershield Preservative Primer** +(BP)[†]

[†]See back cover for full details.

Dulux Trade
Ultimate Opaque

SOLVENT-BASED
DATA SHEET 624

A high performance opaque finish, ideal for **exterior joinery** and **cladding**



BENEFITS	Exceptional durability – up to 10 years protection. Excellent spreading rate of up to 20m² per litre
Colour range	Available in Black and White ready-mixed and 600 colours within the opaque range
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16 hours
Coverage	Smooth wood: up to 20m²/litre/coat (normally 2 coats)

- Highly flexible opaque finish resists cracking, flaking and peeling
- Excellent water repellency

N.B. For new wood, use with **Dulux Trade Weathershield Preservative Primer** +(BP)[†]

[†]See back cover for full details.

Dulux Trade
Classic Select Woodstain

SOLVENT-BASED
DATA SHEET 609

A low build, matt, semi-transparent woodstain ideal for large areas such as **cladding**, **facias** and **soffits**



BENEFITS	Offers up to 4 years exterior protection. Deep penetrating woodstain which will not blister or flake
Colour range	Available in 21 natural wood and 18 designer colours including 4 ready-mixed colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16 hours
Coverage	Smooth wood: up to 14m²/litre/coat (normally 2 coats). Rough sawn wood: up to 8m²/litre/coat

- Suitable for smooth planed wood and rough sawn timber

N.B. For new wood, use with **Dulux Trade Weathershield Preservative Primer** +(BP)[†]

[†]See back cover for full details.

Dulux Trade
Yacht Varnish

SOLVENT-BASED
DATA SHEET 608

A durable, solvent-based clear varnish ideal for **hardwood doors**



BENEFITS	Up to 3 years protection. Durable and flexible film which resists flaking and peeling
Colour range	Clear gloss
Pack sizes	1L, 2.5L
Touch dry	6-8 hours
Recoatable	16-24 hours
Coverage	Smooth wood: up to 16m²/litre/coat (normally 2-3 coats on new/bare wood)

- Contains UV filters which help protect against sunlight

N.B. For new wood, use with **Dulux Trade Weathershield Preservative Primer**[†]

[†]See back cover for full details.



THE FUTURE RE-ENGINEERED

- PAINT MADE FROM 35% RECYCLED PRODUCT
- DELIVERS A HIGH-QUALITY MATT FINISH
- REDUCES LEFTOVER PAINT GOING TO LANDFILL



RECLAIMED > RECYCLED > RE-ENGINEERED

FIND OUT MORE AT

WWW.DULUXTRADE.CO.UK/EVOLVE

AkzoNobel and Dulux Trade are registered trademarks of the AkzoNobel Group of Companies or its affiliates. ©AkzoNobel 2021

THE SURE CHOICE FOR INDOOR AIR QUALITY

INTRODUCING THE NEW 99.9% VOC FREE*
DULUX TRADE AIRSURE RANGE



The ultra low Volatile Organic Compounds (VOCs) in the new **Dulux Trade Aircsure** range minimise the impact on indoor air quality**, while maintaining professional results.

*Based on in-can VOC content, measured in accordance with ISO 11890-2:2013. ** Respectively, 'Ultra Low' as this product is 99.9% VOC Free with 'MINIMAL' VOC content (0-0.29%), as defined by the VOC Globe scheme operated by the British Coatings Federation, and minimising impact on indoor air quality as independently tested for emissions, including formaldehyde, TVOC, TSVOC and Cat 1A & 1B carcinogens. Compliant with the emissions limits criteria in BREEAM New Construction 2018. (UK and International), LEED v4 & WELL 2.0.

PRIMERS

Dulux Trade Primers offer the **highest quality products** to solve all your decorating problems, so you can achieve a **truly professional, long-lasting** finish.



PRIMERS

WOOD PRODUCTS	PLACE OF APPLICATION – INTERIOR AND EXTERIOR WOOD SURFACES					RECOATABLE	WATER/ SOLVENT- BASED	
	Hardwoods		Softwoods	Resinous Woods	Creosote/Bitumen Coated Wood			MDF
Quick Dry Wood Primer Undercoat	●		●				2-4 hours	Water-based
Quick Dry MDF Primer Undercoat						●	2 hours	Water-based
Wood Primer	●		●				16-24 hours	Solvent-based
Aluminium Wood Primer				●	●		16-24 hours	Solvent-based

METAL PRODUCTS	PLACE OF APPLICATION – INTERIOR AND EXTERIOR METAL SURFACES								RECOATABLE	WATER/ SOLVENT- BASED
	Iron		Steel		Other Non-Ferrous Metals		Galvanised Steel			
	Weathered but clean	New	Weathered but clean	New	Weathered but clean	New	Weathered	New		
Metalshield Quick Dry Primer					●	●	●	●	4-6 hours	Water-based
Mordant Solution								●	Within 48 hours	Water-based
Metalshield Zinc Phosphate Primer	●	●	●	●			●	●*	7 hours	Solvent-based

WALLS AND CEILINGS PRODUCTS	PLACE OF APPLICATION – INTERIOR SURFACES					RECOATABLE	WATER/ SOLVENT- BASED
	New & bare plaster	Plasterboard	Limewash/ Distemper	Masonry	Problem surfaces e.g. ceramic tiles		
Dry Wall Primer Sealer		●				2-4 hours	Water-based
Stain Block Primer			●	●		6-8 hours	Water-based
Alkali Resisting Primer	●	●		●**		16-24 hours	Solvent-based

ADHESION PROMOTING PRODUCTS	PLACE OF APPLICATION – INTERIOR SURFACES					RECOATABLE	WATER/ SOLVENT- BASED
	New & bare plaster	Masonry	Hardwood or non-resinous softwood	Iron, Steel, other Non-Ferrous Metals	Problem surfaces e.g. ceramic tiles		
Super Grip Primer					●	4-8 hours	Water-based
Ultra Grip Primer					●	16 hours	Water-based
All Purpose Primer	●	●	●	●		6 hours	Solvent-based

* If mordant solution is used
** Can also be used externally

PRIMERS

Dulux Trade Quick Dry Wood Primer Undercoat

WATER-BASED
DATA SHEET 202

A quick drying **dual-purpose primer** undercoat suitable for interior and exterior use



Quick
Drying

BENEFITS	Primes and undercoats with two coats. For soft and hardwoods. Provides excellent adhesion
Colour range	White
Pack sizes	1L, 2.5L, 5L
Touch dry	1 hour, dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 13m ² per litre on most surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Can be used with the **Dulux Trade** range of quick drying water-based finishes to offer a complete water-based system

Dulux Trade Quick Dry MDF Primer Undercoat

WATER-BASED
DATA SHEET 205

Dual purpose **primer** and **undercoat**



Quick
Drying

BENEFITS	Interior & exterior use. Primes and undercoats with two coats. For MDF surfaces
Colour range	White
Pack sizes	2.5L
Touch dry	Dependent upon temperature and humidity
Recoatable	2 hours
Coverage	Up to 13m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- For interior and exterior use
- Low odour
- Primes and undercoats in one

Dulux Trade Wood Primer

SOLVENT-BASED
DATA SHEET 201

A general purpose solvent-based **primer**



BENEFITS	Seals the surface to provide excellent adhesion. For softwoods and hardwoods
Colour range	White
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	After 16-24 hours
Coverage	Up to 15m ² per litre on most surfaces
Thinning	This product should not be thinned

Dulux Trade Aluminium Wood Primer

SOLVENT-BASED
DATA SHEET 204

An **aluminium pigmented primer** for use on all types of wood and aged creosoted or bitumen coated surfaces



BENEFITS	For outstanding sealing properties. For resinous and creosoted wood
Colour range	White
Pack sizes	1L, 2.5L, 5L
Touch dry	3-4 hours
Recoatable	16-24 hours
Coverage	Up to 17m ² per litre
Thinning	This product should not be thinned

- Specially formulated to provide a dead matt, non-reflective finish in all angles
- Ideal for hiding surface imperfections

PRIMERS

Dulux Trade Metalshield Quick Dry Primer

WATER-BASED
DATA SHEET 510

A **water-based primer** for non ferrous metals



TIP Applying our straight-forward, single pack system – an appropriate Metalshield Primer plus 2 coats of Metalshield Gloss or Satin – will deliver up to 8 years metal protection

Quick
Drying

BENEFITS	8 year protection. For ferrous metal. Provides excellent corrosion resistance
Colour range	White
Pack sizes	1L, 5L
Touch dry	2-4 hours
Recoatable	4-6 hours
Coverage	Up to 18m² per litre on most surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- No pre-treatment required for new surfaces
- Ensure all surfaces are sound, dry and free from grease, wax and oil
- Not recommended for use on heated surfaces, at temperatures below 10°C or in areas of high humidity or condensation

Dulux Trade Metalshield Zinc Phosphate Primer

SOLVENT-BASED
DATA SHEET 511

High performance, **primer** with excellent rust inhibiting properties



TIP Applying our straight-forward, single pack system – an appropriate Metalshield Primer plus 2 coats of Metalshield Gloss or Satin – will deliver up to 8 years metal protection

BENEFITS	8 year protection. For ferrous metal. Provides excellent corrosion resistance
Colour range	Grey
Pack sizes	1L, 5L
Touch dry	2-3 hours
Recoatable	7 hours
Coverage	Up to 13m² per litre on most surfaces
Thinning	This product should not be thinned

- Can be used on heated surfaces up to 90°C
- Suitable for use over hand cleaned iron and steel, blast clean surfaces, weathered or pre-treated galvanized steel

Dulux Trade Mordant Solution

WATER-BASED
DATA SHEET 509

Chemically etches the surface of new, **bright galvanized metal** to provide adhesion for subsequent paint systems



BENEFITS	For preparation of new galvanized metal. Chemically etches and prepares surfaces
Colour range	Blue/Green
Pack sizes	2.5L
Recoatable	Pre-treated surface should be overcoated with appropriate Dulux Trade metal primer within 48 hours

- To get the best results ensure surfaces to be painted are sound, clean and dry and free from all defective or poorly adhering material such as dirt, grease and wax.

Dulux Trade Dry Wall Primer Sealer

WATER-BASED
DATA SHEET 548

A high quality, water-based paint for new **plasterboard walls** and **ceilings**



BENEFITS	Seals the surface to help even out surface porosity on drywall and promote a good opacity finish
Colour range	White
Pack sizes	10L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 15m² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- Ideal for new plaster boards

PRIMERS

Dulux Trade Stain Block Primer

WATER-BASED

DATA SHEET 307

A 2-in-1 **problem solving primer** that seals and binds surfaces and blocks common stains



BENEFITS	For interior walls and ceilings. For water damage and other light, common stains
Colour range	White
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	After 6-12 hours. Note – this product can usually be recoated within 6-8 hours – but on very porous surfaces a longer drying time may be required
Coverage	Up to 14m ² per litre. 2 coats may be required on severely stained surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- Effective treatment for stains caused by water-based and solvent-based inks, crayon, biro, coffee, scuff marks, water and nicotine

Dulux Trade Alkali Resisting Primer

SOLVENT-BASED

DATA SHEET 301

For use on **interior** and **exterior** masonry surfaces that may contain alkalis



BENEFITS	For plaster and masonry surfaces. Seals fresh, alkaline surfaces. Blocks stains such as nicotine and fire damage
Colour range	Off White
Pack sizes	1L, 5L
Touch dry	8-12 hours
Recoatable	16-24 hours
Coverage	Up to 9m ² per litre on most surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- Seals tobacco stains and smoke damage
- Can be used as a primer on new, dry, interior plaster and masonry
- Holds back tobacco tar stains or smoke damage after thorough cleaning

Dulux Trade Super Grip Primer

WATER-BASED

DATA SHEET 309

An adhesion promoting primer for **interior** and **exterior** use



BENEFITS	Provides good adhesion on problem surfaces. For surfaces such as ceramic tiles, laminates and glass
Colour range	White
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 18m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- For use on surfaces such as ceramic tiles, melamine, glass, anodised aluminium, aged gloss paint, stove enamel and powder-coated metal

Dulux Trade Ultra Grip Primer

WATER-BASED

DATA SHEET 308

A two-pack primer formulated to provide excellent adhesion to both **interior** and **exterior** surfaces



BENEFITS	Provides excellent adhesion on problem surfaces. For surfaces such as stove enamels, laminates and glass. Two pack primer
Colour range	White
Pack sizes	1L when mixed (0.8L Base 0.2L Activator)
Touch dry	4-6 hours at 20°C
Recoatable	Minimum 16 hours and maximum 7 days. Hard dry after 16 hours. Recoat within 7 days for optimum intercoat adhesion
Coverage	Up to 10m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- For use on ceramic wall tiles, anodised aluminium, powder-coated metal etc.
- Suitable for interior and exterior use
- Pot life of up to 6 hours once mixed

Dulux Trade
All Purpose Primer

SOLVENT-BASED

DATA SHEET 303

A general purpose primer for **interior** and **exterior** use on most wood, metal and plaster surfaces



BENEFITS	For wood, metal and masonry. Provides good adhesion
Colour range	Grey
Pack sizes	1L, 2.5L
Touch dry	6 hours
Recoatable	After 6 hours
Coverage	Wood: up to 8m ² per litre. Metal: up to 11m ² per litre. Plaster: up to 7m ² per litre
Thinning	This product should not be thinned

- Penetrates bare wood to protect and seal
- Contains a rust inhibitor to protect metal surfaces against corrosion
- Not suitable for use on resinous softwoods and galvanised steel

SCUFFS DON'T STAND A CHANCE

Protect walls in high-traffic spaces with new Dulux Trade Scuffshield Matt. Its unique formula withstands knocks and bumps from everyday objects, leaving your paintwork scuff-free and looking pristine for longer.



WITH SCUFFSHIELD MATT

WITH STANDARD MATT

PRE- DECORATIVE PRODUCTS

Polycell Trade is a **comprehensive range** of trade formulated pre-decorative products, created to **help professionals** get the sure foundation you need for **high quality paint** and **wallpaper finishes**, as well as being practically designed for everyday use.



PRE-DECORATIVE PRODUCTS

PRE-DECORATIVE PRODUCTS	PLACE OF APPLICATION						PAINTABLE	COMPOSITION
	Level of Damage to Surface					Problem Areas		
	Minor Imperfections (Interior Only)	Medium Sized Imperfections		Large or Deep Imperfections		Stained Surfaces		
		Interior	Exterior	Interior	Exterior			
Polyfilla Quick Drying Filler	•						10 minutes	Ready-mixed
Polyfilla Fine Surface	•						1 hour	Ready-mixed
Polyfilla One Fill				•	•		From 15 minutes	Ready-mixed
Polyfilla Deep Hole				•	•		30 minutes	Ready-mixed
Polyfilla All Purpose		•	•				Up to 24 hours	Powder/ Ready-mixed
Polyfilla Easy Sand Interior Filler		•					Up to 24 hours	Powder
Polyfilla Exterior Filler			•				Up to 24 hours	Powder
Polyfilla Woodflex		•	•				Up to 24 hours	Ready-mixed
Polyfilla Decorators Caulk		•	•				1 hour	Ready-mixed
Polycell Stain Block						•	10 mins-12 hours	Solvent-based
Polyfilla Expanding Foam				•	•		12 hours	Ready-mixed
Polycell Extra Strong Paste							N/A	Adhesive for wall coverings
Polyfilla Ready-Mixed Adhesive							N/A	Adhesive for wall coverings

PRE-DECORATIVE PRODUCTS

Polyfilla Quick Drying Filler

READY-MIXED

DATA SHEET 122

For **small interior jobs** when you're in a hurry



BENEFITS	Can be used straight from the tube. Ideal for small interior jobs when you are in a hurry
Pack sizes	330g tube
Paintable	Set in as little as 10 minutes

- Sands easily
- Will not shrink or crack
- Fills hairline cracks

Polyfilla Fine Surface

READY-MIXED

DATA SHEET 116

For **filling minor to medium sized cracks**, surface imperfections and open woodgrain on interior surfaces



BENEFITS	Extra adhesive strength allows vigorous sanding and fine feathering
Pack sizes	500g, 1.75kg
Paintable	30 to 60 minutes depending on surface and surrounding conditions

- Sands to a glass-smooth finish
- No need to prime - over-paint in an hour

Polyfilla One Fill

READY-MIXED

DATA SHEET 121

A **lightweight filler** designed to fill deep repairs in one application without sagging or slumping - even on ceilings



BENEFITS	Smooth finish - no need to sand
Pack sizes	1L, 4L
Paintable	15 minutes depending on surface, temperature, relative humidity and depth of fill

- Millions of microscopic glass beads give no-sag characteristics
- Will not shrink or crack
- Not structural
- For interior and exterior use

Polyfilla Deep Hole

READY-MIXED

DATA SHEET 129/130

Fills holes up to 50mm deep in **one application** and is ready to paint from 30 minutes



BENEFITS	A structural filler for deep holes. No shrinking, cracking or sagging
Pack sizes	1kg
Paintable	From 30 minutes
Mix ratio	1:1, 2 part pack
Working time	Up to 10 minutes

- Accepts screws and nails
- Smooth finish
- Ultimate ease of sanding
- Interior and exterior use

PRE-DECORATIVE PRODUCTS

Polyfilla
All Purpose

POWDER &
READY-MIXED
DATA SHEET 112/113

For **indoor** and **outdoor repairs** to most building materials



BENEFITS	Smooth, easy to sand. Dries white, will not shrink or crack
Pack sizes	Ready-Mixed: 1kg, 2kg Powder: 2kg, 5kg, 10kg
Paintable	Up to 24 hours depending on surface, temperature, relative humidity and depth of fill. Ready Mixed 1cm layers will be surface dry in about 1 hour
Set time	Up to 4 hours depending on surface, temperature, relative humidity and depth of fill

- Ready mixed accepts nails and screws
- Strong adhesion

Polyfilla
Easy Sand Interior Filler

POWDER
DATA SHEET 119/120

For indoor repairs to **plaster, plasterboard, wood, brick, stone** and most other building materials



BENEFITS	Easy to apply and long working time. Easy to sand to a very smooth finish
Pack sizes	2kg, 5kg, 10kg
Paintable	Up to 24 hours
Set time	Touch Dry - 3.5 hours per 5mm layer depending on temperature, humidity and depth of area filled
Working time	90 minutes
Mix ratio	2 parts filler to 1 part water

- Sands down easily in a fraction of time, so jobs can be finished more quickly and with a perfect result
- Ideal for painting because it's resistant to flashing and grinning

Polyfilla
Exterior Filler

POWDER
DATA SHEET 115

Based on **high strength cement** and **special resins** to promote powerful adhesion, toughness and impact resistance



BENEFITS	Rock hard finish, good impact resistance
Pack sizes	2kg
Paintable	Up to 24 hours
Set time	1 hour depending on surface, temperature, relative humidity and depth of fill
Working time	30 minutes
Mix ratio	Mix approx. 2.5 volume of powder with 1 volume of water to give the desired consistency. Always add the powder to the water. For very porous surfaces use slightly more water. Fill repair slightly proud. Level to the surrounding area by either smoothing or by scraping when the filler is firm but before it sets.

- Strong adhesion, accepts fixings, nails and screws
- Always use an alkali-resistant primer before application

Polyfilla
Woodflex

READY-MIXED
DATA SHEET 124/125

Flexible, **water-resistant filler** that bonds strongly to wood



BENEFITS	Can be painted or stained. Interior and exterior use
Pack sizes	330g tube, 600ml tub
Paintable	Up to 24 hours depending on surface, temperature, relative humidity and depth of fill. 1cm thick layers will be surface dry in about 2 hours

- Dries to a smooth and flexible finish
- Water-resistant finish will not shrink or crack
- Easy to use and sand
- Specially formulated to fill holes of any depth or size

PRE-DECORATIVE PRODUCTS

Polyfilla
Decorators Caulk

READY-MIXED

DATA SHEET 103/104/131

Water resistant, **flexible acrylic sealant** for interior and exterior applications



BENEFITS	Smooth finish - no need to sand
Pack sizes	290ml (white only) and 380ml (all colours)
Paintable	1 hour depending on surface, temperature, relative humidity and depth of fill

- Polycell Polyfilla Decorators Caulk is a flexible permanent acrylic sealant specially formulated for internal and external use in areas subject to movement. It is suitable for sealing around architraves and cornices, sealing cracks between skirting boards and walls, pointing around window and doorframes and filling cracked plaster. It gives a smooth finish that does not require sanding
- Available in White, Magnolia and Brown

Polycell
Stain Block

SOLVENT-BASED

DATA SHEET 107/108

Permanently blocks most **problem stains** and prevents bleeding through after decoration



BENEFITS	The aerosol can be overpainted in about 10 minutes. Treats stains caused by water, nicotine, soot, graffiti, grease, wax and rust
Pack sizes	500ml, 1L, 2.5L
Touch dry	2-3 hours
Paintable	Liquid: 12 hours. Aerosol: 10 minutes
Coverage	Liquid: 7.9m² per litre. Aerosol: 0.8m² per 250ml

- Polycell Stain Block Aerosol permanently covers a great number of different stains, such as nicotine, soot, rust, grease, ballpoint pen and lipstick
- Available as conventional paint or aerosol
- For interior use

Polyfilla
Expanding Foam

READY-MIXED

DATA SHEET 114/132

Expands to **fill large holes** and **gaps**, **inside** and **outside**



BENEFITS	Expands up to 45 times can volume. Easy to cut, sand, paint and plaster. Strong, long-lasting, damp-resistant seal
Pack sizes	750ml
Paintable	Can be cut after 1 hour and painted after 12 hours

- Will not shrink when cured

Polycell
Extra Strong Paste

FLAKES

DATA SHEET 106

Instantly mixes to a smooth paste offering **easy slippage** and **excellent wet tack**



BENEFITS	Instant mix to smooth paste. Long working time, easy slip, excellent wet tack. Extra strong adhesion. Low salt content means improved stain prevention
Pack sizes	10 and 30 rolls
Coverage	Normal = 8-10 rolls per sachet. Heavy = 3-4 rolls per sachet
Drying time	14-18 hours

PRE-DECORATIVE PRODUCTS

Polycell Ready Mixed Adhesive

READY-MIXED

DATA SHEET 128

Low water content makes it **ideal for wallcoverings** prone to shrinkage. Easy to use straight from the tub



BENEFITS	Easy to use straight from the tub. High initial wet tack resulting in strong final adhesion
Pack sizes	5kg
Coverage	1 roll per kg
Drying time	14-18 hours

- Excellent slip, long open time
- Low water content means ideal for wallcoverings prone to shrinkage
- To get the best results make sure the surfaces to be papered are sound, clean and dry. (New surfaces particularly must be fully dry)
- For interior use

TIME SAVING DIGITAL TOOLS

DULUX TRADE PAINT SPECIFICATION CREATOR

Fast and easy to use online tool for creating specifications for trade paint and woodcare. Use the **Paint**

Specification Creator as a quick reference guide or to build an in-depth specification for tender documentation. Simple filters let you search for and select the right products for your project.

Visit content.duluxtradepaintexpert.co.uk/paintspec



DULUX TRADE EXPERT APP

As well as having our most up to date product and colour offering, the **Dulux Trade Expert App** includes a paint calculator allowing you to work out exactly what you need for your project. This app also links to the **Dulux Trade Colour Sensor** allowing you to colour match on the job along with a live visualizer function.

Download Free from IOS and Android now.



PICK THE PERFECT COLOUR



DULUX TRADE LET'S COLOUR PROFESSIONAL GUIDE

Updated annually to offer the right balance of new shades alongside traditional favourites, this key colour tool also offers inspiration and topline product information for your clients.



HERITAGE COLOUR GUIDE

The Heritage range is a collection of beautiful colours that will complement any space, providing authentic period detail in today's high performance finishes.



WEATHERSHIELD PROFESSIONAL COLOUR GUIDE

Available in a wide range of colours, Weathershield products offer unbeatable protection for exterior masonry, wood and metal trim.



WOODCARE COLOUR GUIDE

Showcasing a stunning range of toned, bold and bright colour choices, our Woodcare Colour Guide has the perfect shade for every project, inside and out.



DULUX TRADE COLOUR SCHEMER

When working on commercial projects, use the **Dulux Trade Colour Schemer** to select and visualise colour schemes, and in a few clicks you will have professional branded mood boards to share with clients.



To find out more about colour, visit duluxtradepaintexpert.co.uk/colours

For 25 years
only the best
have been
selected



AkzoNobel

Being a Dulux Select Decorator

Benefits for you and your business...



Use of the Dulux Select Decorators logo



Subsidised rates at Dulux Academy



Awards & recognition



Social events



Regular competitions



Monthly e-news



Access to an exclusive forum



Product discount vouchers

Provides your customer with...



Customer reassurance & peace of mind with two year guarantee



A reason to choose you above the competition



Trust and confidence in your work as an accredited member



Professional end to end customer experience

Do you qualify to be a Dulux Select Decorator



Have you worked as a painter and decorator for three years?



Can you provide three customer references from completed jobs?



Have you run your own business for at least a year?



Are you confident of passing a full on-site assessment of your workmanship & customer service?



Is 60% of your work from domestic properties?
Access to an exclusive forum

Annual Membership £234 plus initial joining fee £60 (inc. VAT)



Visit www.duluxtradepaintexpert.co.uk/en/services/dulux-select-decorator to find out more

THE PERFECT
MATCH FOR
PROFESSIONALS



The palette in your pocket.

With the NEW Dulux Trade Colour Sensor, scan a colour and get a Dulux colour match in seconds.

To find out more and get matching, please visit duluxtrade.co.uk/sensor



QUICK REFERENCE GUIDE

Product	
Airsure Diamond Matt	11
Airsure Vinyl Matt	10
Alkali Resisting Primer	76
All Purpose Primer	78
Aluminium Paint	52
Aluminium Wood Primer	73
Anti-Graffiti Clearcoat	48
Anti-Graffiti Primer	48
Blockfiller Plus	49
Cladshield	51
Classic Select Woodstain	65
Colour Sampler	17
Danish Oil	62
Diamond Eggshell	12
Diamond Glaze Varnish	60
Diamond Matt	10
Diamond Satinwood	22
Dry Fall Eggshell	49
Drywall Primer Sealer	75
Durable Flat Matt	13
Eggshell	25
Evolve Matt	13
Fast Matt	16
Floorshield	50
Heritage Eggshell	26
Heritage Quick Dry Primer Undercoat	26
Heritage Velvet Matt	12
High Gloss	24
High Performance Floor Paint	50
Line Marking Paint	51
Metalshield Gloss	53
Metalshield Quick Dry Primer	74
Metalshield Satin	53
Metalshield Zinc Phosphate Primer	75
Mordant Solution	74
Mouldshield Fungicidal Eggshell	45
Mouldshield Fungicidal Matt	45
PLUS Smartshield+	52
Polycell Extra Strong Paste	89
Polycell Ready-Mixed Adhesive	90
Polycell Stain Block	88
Polyfilla All Purpose	86
Polyfilla Decorators Caulk	88
Polyfilla Deep Hole	85
Polyfilla Easy Sand Interior Filler	86
Polyfilla Expanding Foam	89
Polyfilla Exterior Filler	87
Polyfilla Fine Surface	84
Polyfilla One Fill	85
Polyfilla Quick Drying Filler	84
Polyfilla Woodflex	87
Polyurethane Varnish	61
Protective Woodsheen Woodstain	61
Pyroshield Basecoat	46
Pyroshield Durable Eggshell	47
Pyroshield Durable Matt	46
Quick Dry Gloss	23
Quick Dry MDF Primer Undercoat	72
Quick Dry Opaque	63
Quick Dry Satinwood	22
Quick Dry Undercoat	23
Quick Dry Varnish	60
Quick Dry Woodstain	62
Quick Dry Wood Primer Undercoat	72
Satinwood	24
Scuffshield Matt	11
Stain Block Primer	76
Sterishield Diamond Eggshell	44
Sterishield Diamond Matt	44
Super Grip Primer	77
Supermatt	16
Ultimate Opaque	64
Ultimate Woodstain	64
Ultra Grip Primer	77
Ultra Matt	15
Undercoat	25
Vinyl Matt	14
Vinyl Silk	14
Vinyl Soft Sheen	15
Weathershield Exterior Flexible Filler	39
Weathershield Exterior Flexible Undercoat	38
Weathershield Exterior High Gloss	37
Weathershield Maximum Exposure Smooth Masonry	34
Weathershield Multi-Surface Fungicidal Wash	39
Weathershield Preservative Primer ^(BPF)	38
Weathershield Quick Dry Exterior Gloss	36
Weathershield Quick Dry Exterior Satin	36
Weathershield Quick Dry Exterior Undercoat	37
Weathershield Smooth Masonry	34
Weathershield Stabilising Primer	35
Weathershield Textured Masonry	35
Wood Primer	73
Yacht Varnish	65

NOTES

[illegible]This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

VISIBLE PROTECTION AGAINST MOULD & ALGAE



NEW
IMPROVED
FORMULATION



Best ever mould and algae protection†
Excellent opacity and easy to apply
Anti-Fade Technology for long lasting colour*
Shower resistant in 30 minutes

†Compared to previous Smooth Masonry formulations. *Excluding white.

work
of art,
YES.
—
hard
work,
NO.



HERITAGE

EXTRAORDINARY PAINT
for EVERYDAY LIFE



DH OXFORD BLUE in VELVET MATT

Heritage is available nationwide from many specialist Decorating Merchants, Homebase and Dulux Decorator Centre. Find your nearest stockist at duluxheritage.co.uk



Contact Us

To receive more information on **Dulux Trade** products register online at **duluxtrade.co.uk**

You can also request information, technical advice and help with product specification by calling **0333 222 7070**
Email: **duluxtrade.advice@akzonobel.com**

Or write to: **Trade Technical Advice Centre, AkzoNobel, Wexham Road, Slough SL2 5DS**

Interact with **Dulux Trade**



*This figure is based on theoretical calculations on pairs of bare rooms of dimensions 4x3x2.4m where the light incident on all surfaces is averaged. The rooms all have the same mid-grey floor colour (LRV 50). They have a white ceiling and a colour on the walls. In one of each pair, the colour used is from the **Light & Space** range. In the other, the colour used is from conventional products. The **Light & Space** and conventional colours have similar hue (colour family) and chroma (intensity of colour). The energy savings will not always equate to 22%. They will vary depending on the contents, dimensions and floor colour of the room and will differ if lighting in particular areas needs to be controlled. The calculated figure varies from 14% to 28% depending on the wall colour chosen. The actual light energy savings achieved in practice may differ from the calculations.

#Dulux Trade Mouldshield Fungicidal Eggshell and **Dulux Trade Mouldshield** Fungicidal Matt contain 3-iodo-2-propynyl-n-butylcarbanate.

†Dulux Trade Weathershield Preservative Primer^(BP) contain propiconazole and IPBC.
USE BIOCIDES SAFELY. ALWAYS READ THE LABEL AND PRODUCT INFORMATION BEFORE USE.

AkzoNobel, the AkzoNobel logo, the flourish logo, Dulux, Dulux Trade, Dulux Select Decorators, Weathershield, Weathershield All Seasons, Aquatech, Polycell, Polycell Trade, Polyfilla, Woodflex Polyfilla, Metalshield, Sterishield, Mouldshield, Dulux Dry Fall, Cladshield, Pyroshield, Floorshield, Diamond Glaze, Light & Space, Lumitec and Dulux Trade Colour Palette are trade marks of the AkzoNobel group. © AkzoNobel 2021.

